JGAPOSA

SIDENE LP400T / LP550T / LP650T

SIDE MOTOR FOR HEAVY ROLLING SHUTTERS.



Each component can to hold dynamic loads over the nominal torque.



Integrated safety brake and double circuit limit switch: all the safeties to comply with the EN13241-1 standards.




2 override options: - Hand chain manual; - Handle.

Very low dB level.




The high motor safety factor guarantees powerful performances and a lifting capacity higher than the nominal one.

155

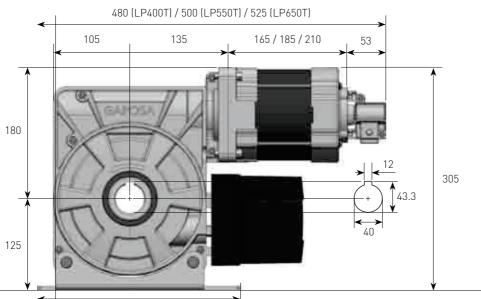

SIDONE, as standard, is for horizontal application. It can be installed in vertical position, according to the room available, by using the suitable basement.

TECHNICAL DETAILS	LP400T	LP550T	LP650T
POWER SUPPLY (V~)	380	380	380
FREQUENCY (Hz)	50	50	50
TORQUE (Nm)	400	550	650
OUTPUT SPEED (Min ⁻¹)	11	11	11
POWER (W)	1.2	1.5	1.8
ABSORPTION (A)	3.1	3.8	4.5
DUTY RATING (ED)	S3-60%	S3-50%	S3-50%
LIMIT SWITCH MAX TURNS	10	10	10
TEMPERATURE	-5°C/40°C	-5°C/40°C	-5°C/40°C
NOISE (dB)	<70	<70	<70
PROTECTION RATE (IP)	54	54	54
WEIGHT (Kg)	28	30	32 /



Sizes in mm.