







TUBULAR MOTORS WITH MECHANICAL LIMIT SWITCH AND MANUAL OVERRIDE (VERSION "M").




The high motor safety factor guarantees powerful performances and a lifting capacity higher than the nominal one.



A strong metal motor head reliable for intensive manual overrides and heavy applications.



Developed to fully comply with the regulations of the standard EN13241.

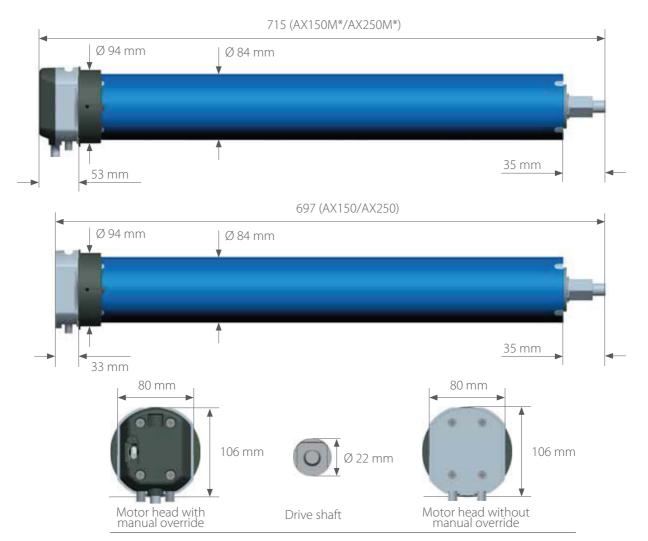

TECHNICAL DETAILS	AX150 / AX150M*	AX250 / AX250M*
POWER SUPPLY (V)	230	230
FREQUENCY (Hz)	50	50
SPEED (min ⁻¹)	12	8
TORQUE (Nm)	150	250
LIMIT SWITCH MAX. TURNS	18	18
ABSORPTION (A)	3	3.2
POWER (W)	700	760
PROTECTION RATE (IP)	44	44
DUTY RATING (min ⁻¹)	4	4